


SPECIFICATIONS	
ES NO.	DESCRIPTION
ES22-122	PACKAGING
ES81-159	CLEANLINESS
ES81-250	IDENTIFICATION
ES92-167	REGULATORY COMPLIANCE

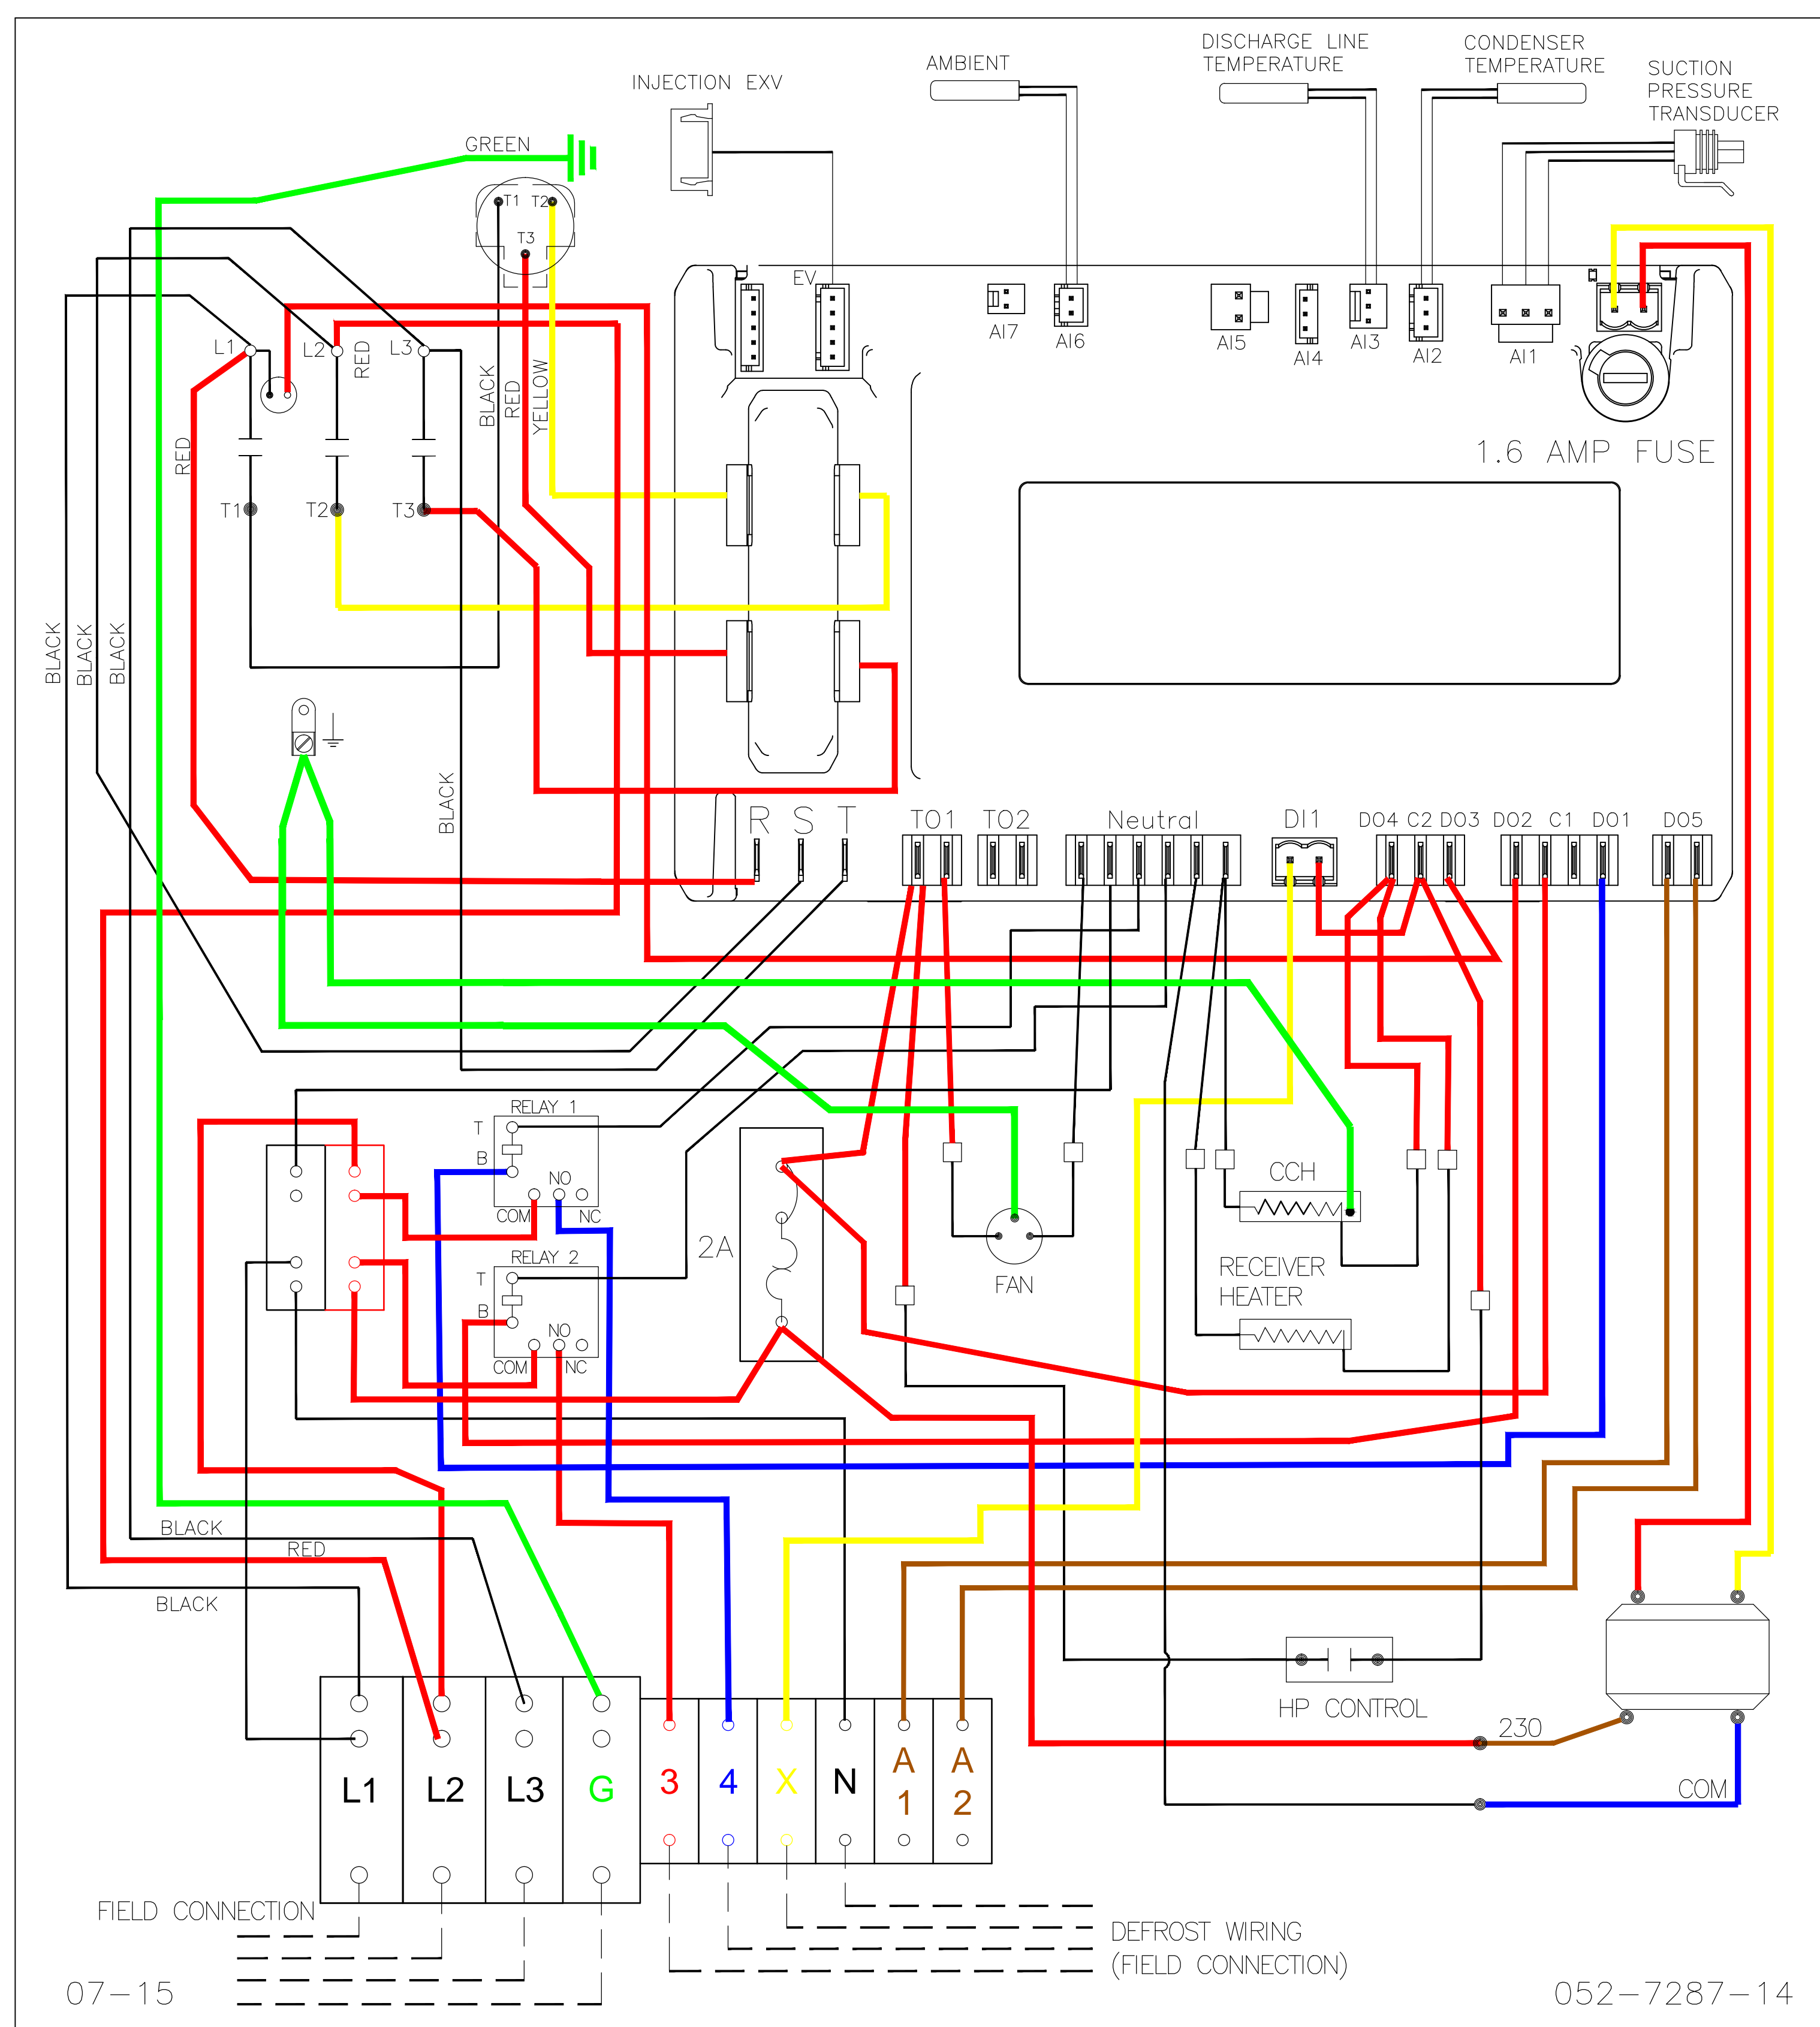

NOTES:

- DO NOT USE THIS DRAWING FOR ARTWORK.
- △ MATERIAL SPECIFICATION:
FACESTOCK: 2 MIL WHITE
POLYESTER (FASSON 40443)
ADHESIVE: S730 SOLVENT ACRYLIC
SERVICE TEMPERATURE: -40° TO 300°F
LINER: 50# BLEACHED CALENDARED
KRAFT PAPER
LAMINATE: 1 MIL CLEAR POLYESTER
(FASSON 77844)
- DIAGRAMS TO BE SUPPLIED IN SHEET FORM.

10.00

9.00

	INTERPRET PER ASME Y14.5M-1994 AND EMERSON CLIMATE TECHNOLOGIES, INC. DESIGN STANDARDS_DS2002 DO NOT SCALE DRAWING		ECN101203 0 RELEASED		07-30-15	HPV	TR
	CRITICAL PRODUCT CHARACTERISTIC UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH OR [MILLIMETER] TOLERANCES: 2-PLACE ± 0.12 3-PLACE ± ANGULAR ±		THIRD ANGLE PROJECTION		CONFIDENTIALITY NOTICE THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMERSON CLIMATE TECHNOLOGIES, INC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMERSON CLIMATE TECHNOLOGIES, INC.		
	MATERIAL SPECIFICATION △ 2		DRAWN BY HPV	SUPERSEDES DWG. NO. / REV. NO.			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCH OR [MILLIMETER] TOLERANCES: 2-PLACE ± 0.12 3-PLACE ± ANGULAR ±		DATE 07-30-15	SCALE NONE	DATE FORMAT: MM-DD-YY		
TITLE DIAGRAM - WIRING			DRAWING NUMBER SHEET 1 OF 1		DWG 4 SIZE		