

Job Name/Location:

Tag No.:

Date:

For: File Resubmit
Approval Other

PO No.:

Architect: GC:

Engr: Mech:

Rep: (Company) (Project Manager)



LA180HYV3

Art Cool™ Premier Single Zone Inverter

Outdoor Unit (ODU) - LAU180HYV3 Indoor Unit (IDU) - LAN180HYV3

Performance:

Cooling:

| | |
|--|-------------------------|
| Cooling Capacity (Min~Rated~Max) (Btu/h) | 3,070 ~ 18,000 ~ 29,515 |
| SEER2 | 24.0 |
| EER2 | 14.4 |

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

Heating:

| | |
|--|-------------------------|
| Heating Capacity (Min~Rated~Max) (Btu/h) | 3,070 ~ 21,600 ~ 32,000 |
| HSPF2 | 10.8 |
| Max. Heating @ Indoor 70°F DB | 24,920 |
| Outdoor 17°F WB | 21,600 |
| Outdoor 5°F WB | 15,680 |
| Outdoor -13°F WB | 15,680 |

HSPF - Heating Seasonal Performance Factor

Cooling Nominal Test Conditions:
Indoor: 80°F DB / 67°F WB
Outdoor: 95°F DB / 75°F WB

Heating Nominal Test Conditions:
Indoor: 70°F DB / 60°F WB
Outdoor: 47°F DB / 43°F WB

Outdoor Unit:

| | |
|----------------------------------|-------------|
| MOP (A) | 30 |
| MCA (A) | 19 |
| Cooling / Heating Rated Amps (A) | 14.81/14.81 |
| Compressor (A) | 14.41 |
| Fan Motor (A) | 0.4 |

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

Total Power Input:

| | |
|--------------------------|------|
| Cooling Power Input (kW) | 1.25 |
| Heating Power Input (kW) | 1.54 |

Piping:

| | |
|--|-----------|
| Liquid Line (in., O.D.) | 3/8 |
| Vapor Line (in., O.D.) | 5/8 |
| Additional Refrigerant (oz./ft.) | 0.38 |
| Min. / Max. Pipe Length (ft.) ² | 9.8 / 164 |
| Piping Length (no add'l refrig., ft.) | 24.6 |
| Max. Elevation (ft.) | 98.4 |

Features:

- 24-Hour on/off timer
- 4-Way auto swing
- Auto restart / changeover
- Jet cool/Jet heat
- Built-in low ambient standard, down to 14°F (cooling mode)
- Chaos Wind
- Condensate Sensor Connection
- Defrost Control
- Dehumidifying Mode
- Hot Start
- Inverter (variable speed compressor)
- Smart Diagnosis
- Washable Filter
- Soft Dry Operation
- Self-cleaning indoor coil
- Built-in base pan heater
- Cooling only/heating only function
- Built-in Wi-Fi via Smart ThinQ app

Optional Accessories:

- Simple Remote Controller - PREMT000
- Standard III Remote Controller (White / Black) - PREMTB100 / PREMTBB10
- MultiSITE™ CRC* - PREMTBVC2/C3/C4
- MultiSITE Comm. Mgr. - PBACNBTR0A
- PI-485 - PMNFP14A1
- Dry Contact - PDRYCB100/320/400
- AC Smart 5 - PACSSA000
- ACP 5 - PACPSA000
- Low Ambient Wind Baffle (Cooling operation to 0°F) - ZLABGP04A

Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps (excluding ductless systems) must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit www.energystar.gov.

(ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.)

For a complete list of available accessories, contact your LG representative.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. / www.lghvac.com

Operating Range:

Outdoor Unit:

| | |
|-----------------|-----------|
| Cooling (°F DB) | 14 ~ 118 |
| Heating (°F WB) | -13 ~ +65 |

Indoor Unit:

| | |
|-----------------|---------|
| Cooling (°F WB) | 53 ~ 75 |
| Heating (°F DB) | 60 ~ 86 |

Electrical:

| | |
|-----------------------|--------------|
| Power Supply (V/Hz/Ø) | 208-230/60/1 |
|-----------------------|--------------|

System Data:

| | |
|--|-------------|
| Refrigerant Type | R410A |
| Refrigerant Control | EEV |
| Refrigerant Charge (lbs.) | 4.85 |
| ODU Sound Pressure (Max., Cool / Heat) (±1 dB[A]) ³ | 53/56 |
| IDU Sound Pressure | |
| Cooling (H/M/L/Sleep) (±1 dB[A]) ³ | 49/44/40/30 |
| Heating (H/M/L) (±1 dB[A]) ³ | 49/44/40 |
| ODU Net / Shipping Weight (lbs.) | 135.4/147.7 |
| IDU Net / Shipping Weight (lbs.) | 37.7/45.6 |
| Heat Exchanger Coating | GoldFin™ |

Fan:

| | |
|------------------------------|---------------------------------------|
| ODU Type | Propeller |
| IDU Type | Cross Flow |
| Fan Speeds (Fan/Cool/Heat) | 6 / 6 / 6 |
| Quantity (ODU + IDU) | 1 + 1 |
| Motor/Drive | Brushless Digitally Controlled/Direct |
| ODU Max. Air Flow Rate (CFM) | 2119 |
| IDU Air Flow | |
| Cooling, Max/H/M/L (CFM) | 813 / 601 / 495 / 389 |
| Heating, Max/H/M/L (CFM) | 919 / 707 / 601 / 495 |
| Dehumidification (pts./hr.) | 4.65 |

Notes:

1. Acceptable operating voltage: 187V-253V.
2. Piping lengths are equivalent.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
4. All communication / connection (power) cable from the outdoor unit to the indoor unit is field supplied and must be a minimum of four-conductor, 14 AWG, stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only), and must comply with applicable local and national codes.
5. See Engineering Manual for sensible and latent capacities.
6. Power wiring cable size must comply with the applicable local and national code.
7. The indoor unit comes with a dry helium charge.
8. This data is rated 0 ft. above sea level, with 24.6 ft. of refrigerant line and a 0 ft. level difference between outdoor and indoor units.
9. Must follow installation instructions in the applicable LG installation manual.



Job Name/Location: _____

LA180HYV3

Art Cool™ Premier Single Zone Inverter


Outdoor Unit (ODU) - LAU180HYV3 Indoor Unit (IDU) - LAN180HYV3



Tag No.: _____

Date: _____

PO No.: _____

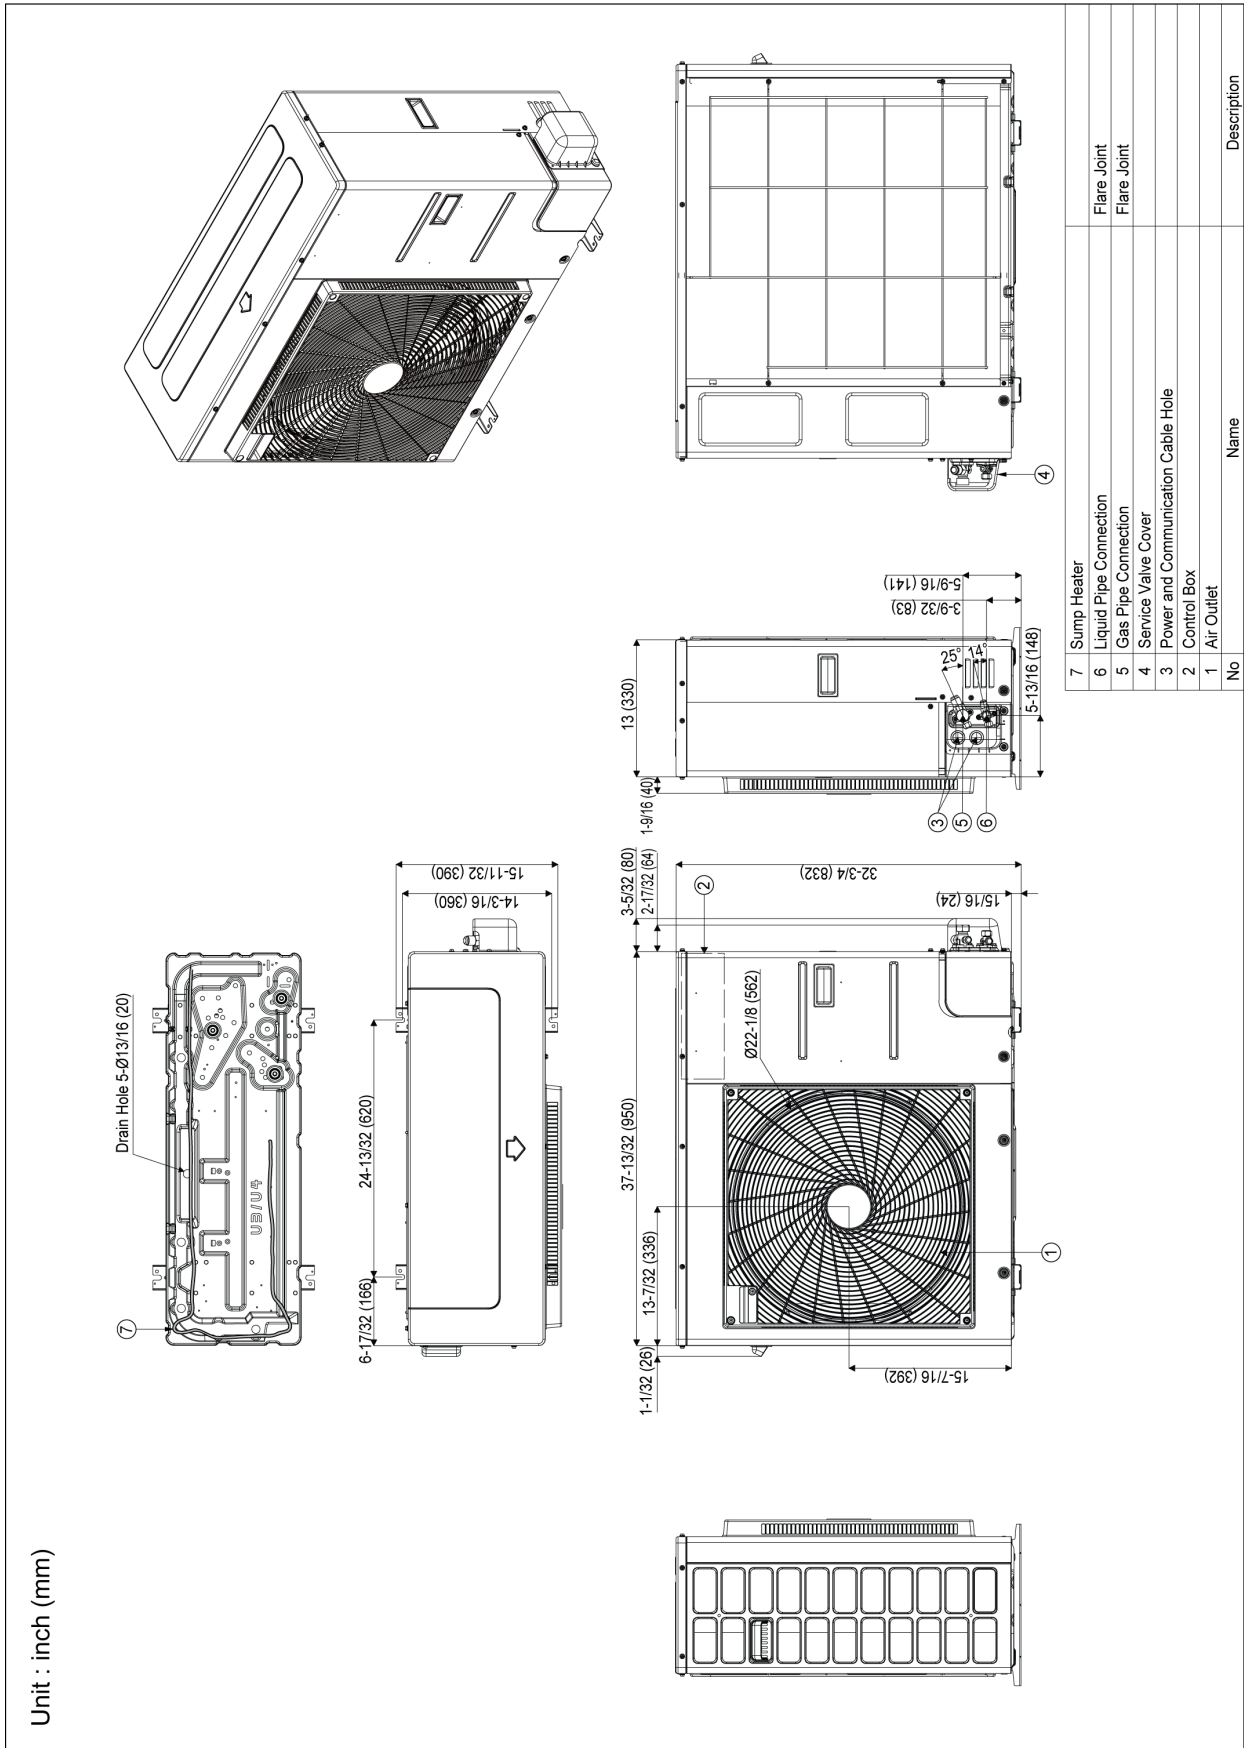

LA180HYV3

Art Cool™ Premier Single Zone Inverter

Outdoor Unit (ODU) - LAU180HYV3 Indoor Unit (IDU) - LAN180HYV3



Tag No.: _____

Date: _____

PO No.: _____

